


## Applied Mouldings


Marshfield DoorSystems offers three standard applied mouldings. They are:

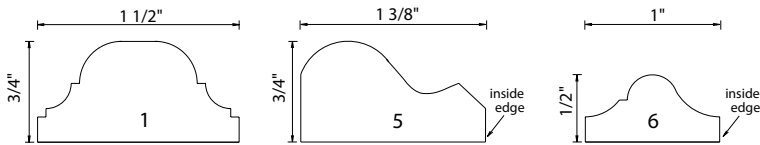

Profile 5 is the applied moulding that will be used on the Marshfield DoorSystems Styled™ Door unless specified otherwise. Additional custom mouldings are available to suit any project. (An upcharge for custom moulding will apply and additional lead-time is required.) Mouldings are available in most species of lumber.

- Unfinished and primed doors will not have nail holes filled.
- Factory finished doors with applied mouldings will have nail holes filled.

## Dutch Shelves

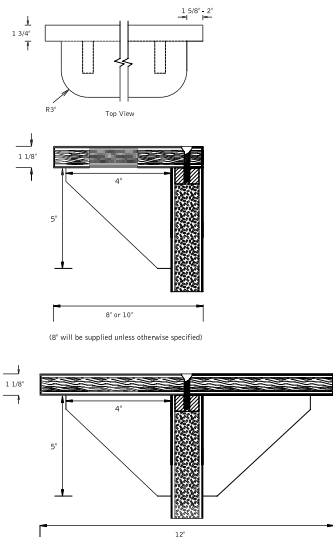

### Dutch Shelves

- Shelves are manufactured at the factory and include wood brackets for jobsite installation. Plastic for shelves is shipped loose for jobsite application.
- Use #12 x 2" full threaded screws. Use one screw for each foot or fractional foot of shelf width to attach shelf to top of bottom leaf. Two screws minimum for any shelf.
- Brackets may be attached with any combination of screws, nails and/or glue.
- On 20-minute dutch doors, a 1/16" x 1/2" intumescent strip is factory installed in the bottom rail of the top leaf.
- Shelf ends are trimmed to length and beveled as ordered and dimensions will vary 1-5/8" - 2".

The mark of excellence™ 

Note: Marshfield DoorSystems doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.