

PerfectMatch™ Fire-Resistant Composite Core Doors - 45-90 Minutes

Neutral Pressure, Positive Pressure, Environmental

Standard Models: PMP, PMD

Environmental Models: EPMP



PerfectMatch™
by Marshfield DoorSystems®

Product Features
and Specifications

Interior Use Only

Thickness

1-3/4"

Maximum Size

	ITS-WH and UL	
	Cat. A (PP) 45-90 min. Mineral Core	Cat. A (PP) 45 min. Particleboard
Single	4/0 x 8/0	4/0 x 8/0
Pair	8/0 x 8/0	6/0 x 7/0
DE Pair	8/0 x 8/0	N/A

Minimum Size

1/5-3/4 x 6/0

Faces

Low Pressure Decorative Laminate

Crossbands

Engineered Composite

Stiles

Manufacturer's standard construction per label service listing.
*Standard stiles include matching laminate edge band.
Stile edges are also available as painted, stained, or with PVC edge band

Top and Bottom Rails

Manufacturer's standard construction per label service listing

Face & Core Assembly Adhesive

Per requirements of WDMA I.S. 1A, C-6

Core

Fire resistant composite per label service listing

Lite Openings

See Appendix I

Warranty

Limited Lifetime. No exterior warranty


Security Rating

Mineral Core- Class 30 per UBC standard 41-1 and ASTM F - 476 Section 18
Particleboard Core- Class 40 per UBC standard 41-1 and ASTM F - 476 Section 18

Environmental Options & LEED Credit Contribution

(Not all credits may be available with some constructions)

- MR 4-Recycled Content- all models

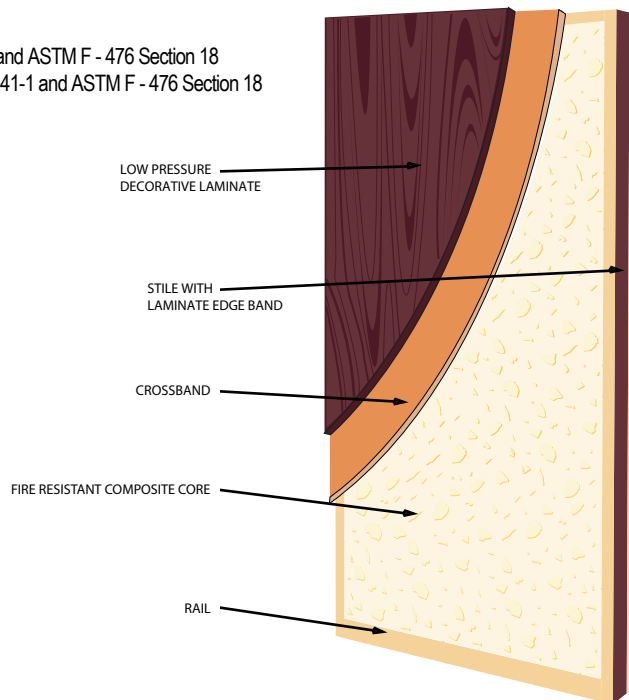

The mark of excellence™

Note: Marshfield DoorSystems doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.