

PerfectMatch™ Particleboard Core Doors

Neutral Pressure, Positive Pressure, Environmental

Standard Models: PMP

Environmental Models: EPMP



PerfectMatch™
by Marshfield DoorSystems®

Product Features
and Specifications

Interior Use Only

Thickness

1-3/4"

Maximum Size

	ITS-WH and UL – Max 20 Minute		
	Non Rated	Cat. A (PP)	Cat. B (PPFM)
Single	4/0 x 8/0	4/0 x 8/0	4/0 x 8/0
Pair	8/0 x 8/0	8/0 x 8/0	8/0 x 8/0
DE Pair	8/0 x 8/0	8/0 x 8/0	8/0 x 8/0

Minimum Size

1/5-3/4 x 6/0

Faces

Low Pressure Decorative Laminate

Crossbands

Engineered Composite

Stiles

Manufacturer's standard construction is 1" structural composite lumber (SCL).
1-3/8" stiles (3/4" Hdwd, 5/8" SCL) available upon request.
1-3/8" SCL stiles available upon request.
*Standard stiles include matching laminate edge band.
Stile edges are also available as painted, stained, or with PVC edge band.

Top and Bottom Rails

Manufacturer's standard construction is 7/8" structural composite lumber.
Wider rails available upon request.

**Face & Core
Assembly Adhesive**

Per requirements of WDMA I.S. 1A, C-6

Core

Particleboard (which complies with ANSI A208.1)

Lite Openings

See Appendix I

Warranty

Limited Lifetime. No exterior warranty

Security Rating

Class 40, highest security rating possible per UBC
standard 41-1 & ASTM F-476 section 18


**Environmental Options &
LEED Credit Contribution**

(Not all credits may be available
with some constructions)

- MR 4-Recycled Content- all models
- MR 5-Regional Materials- all models

WDMA Performance Level

Heavy Duty
* Product does not require blocking for surface hardware.

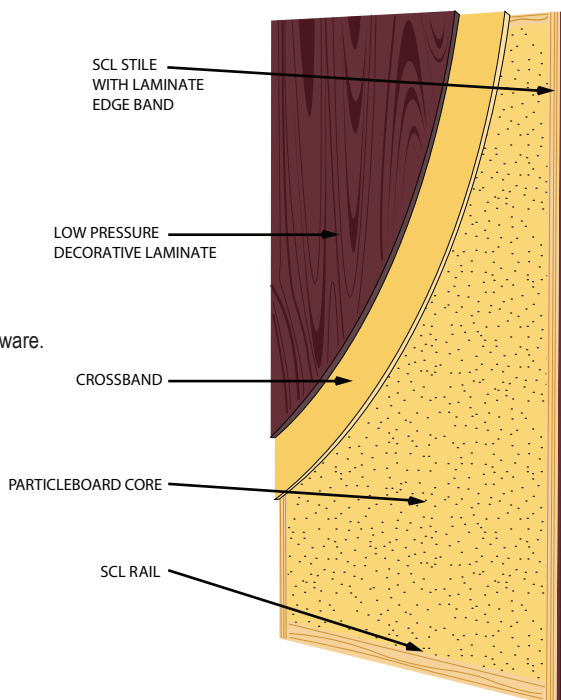

The mark of excellence™



Note: Marshfield DoorSystems doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.

*Note: Fire-Rated doors will be constructed per label service listing and may deviate from above.

The mark of excellence™

